


TARGET:


Sealing of a several leakage points located in the dam's upstream face.

WATER BASIN

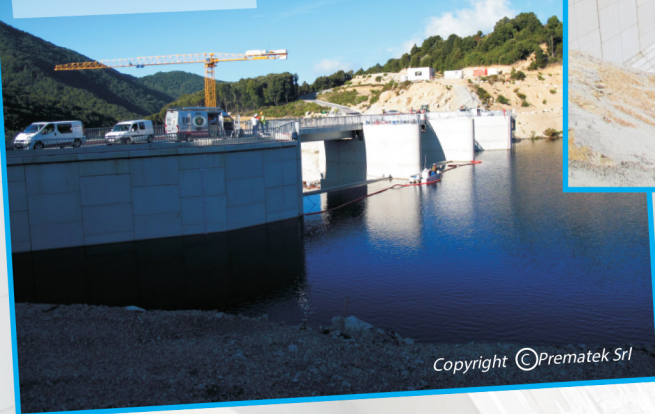

SOLUTION:

Polyurethane resin injection settled with ultra high speed reaction time.

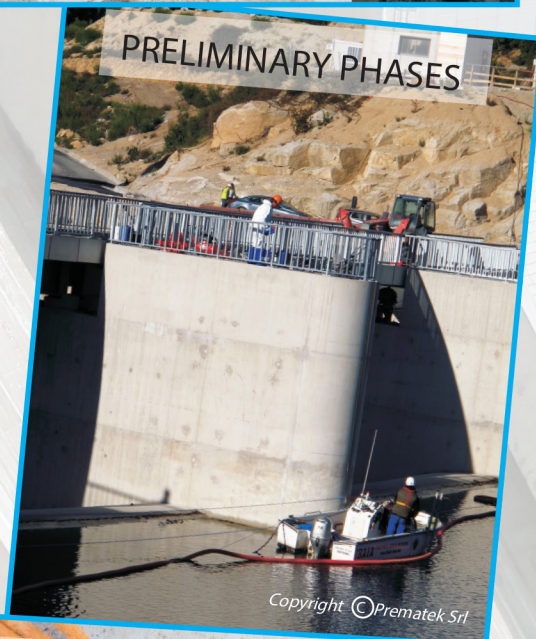

RESULT:

Leakage water flow reduced from the initial 1500 liters/min to the requested 300 liter/min, with the possibility to seal it completely in the future.